

Please check contents **before assembly**. If any items are missing or damaged, **do not take the unit back to the store**. Call 1-800-427-5136 for customer service and we will save you time by correcting any problems directly for you.

TABLE COMPONENTS

4 Preassembled Leg Assemblies

1 Leg Brace Plate

8 Angle Braces

2 Table Tops

NOTE: Cracks or Checks in logs are part of the natural beauty of cedar logs and should not be considered defects.

TOOLS AND HARDWARE
(Shown smaller than actual size)

16 - 2" Screws

14 - 1 3/4" Screws

4 - 2 1/2" Screws

8 - 1/4" x 4" Hex Washer Head Screws

7/16" or 3/8" Socket

#2 Phillips Screwdriver

or

NOTE:

- Read all instructions before starting.

STEP 1 Lay the table tops upside down on a clean flat surface. Slide them tight together. Attach table top halves together with fourteen 1 3/4" screws in areas shown in figure 1.


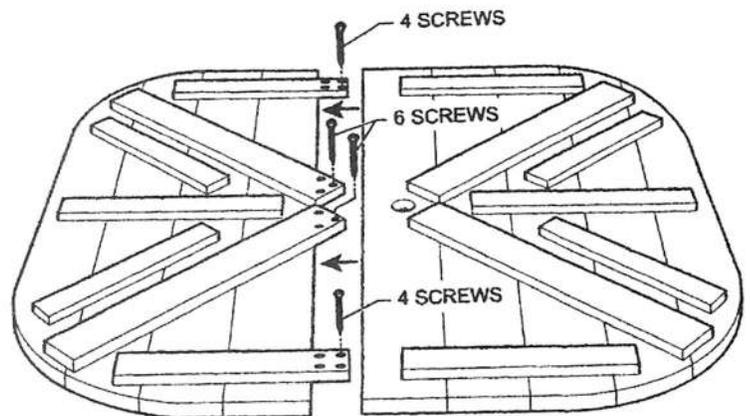


figure 1


figure 2

STEP 2 Place each leg assembly on top of the long cleats which run from the corner to the center of the table. Align the leg assemblies flush with the center end of the cleats. Attach with 4" Hex Washer Head Screws as shown in figure 2.

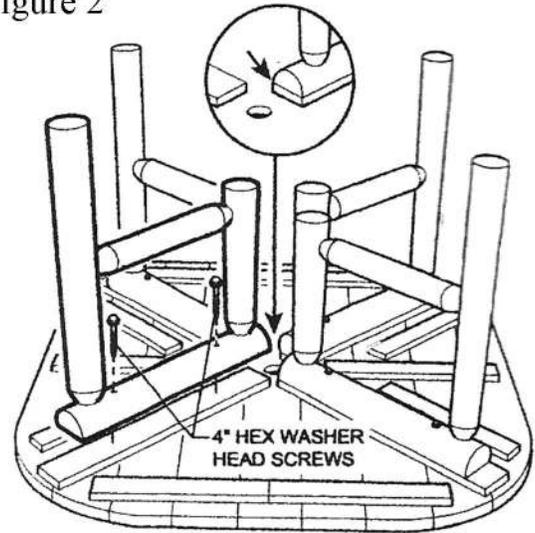


STEP 3 Center the leg brace plate on top of the leg assemblies. Attach with one 2 1/2" screw into each leg as shown in figure 3.

figure 3

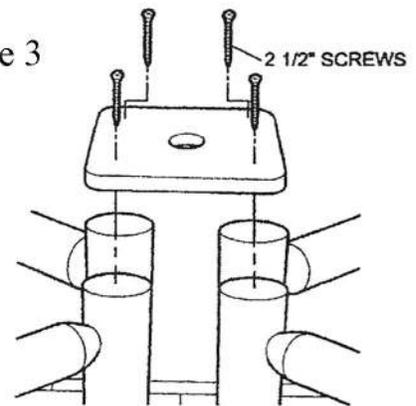


STEP 4 At the corners of the table attach two angle braces to the outside legs. Place against the leg and angle until it is over the table cleats. Attach securely with two 2" screws. Repeat for all the legs. As shown in figure 4.

figure 4

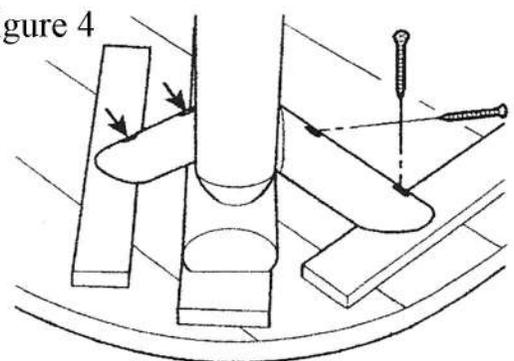

Your table is now assembled and ready for finish or immediate use.



If you have hardware left over after completing your unit, it most likely has been assembled incorrectly, and may not be safe to use. Please call Customer Service at 800-427-5136 for assistance.

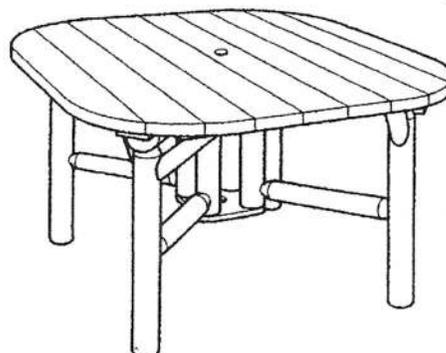

Check all joints for tightness before and during each usage season.




Please check contents **before assembly**. If any items are missing or damaged, **do not take the unit back to the store**. Call 1-800-427-5136 for customer service and we will save you time by correcting any problems directly for you.

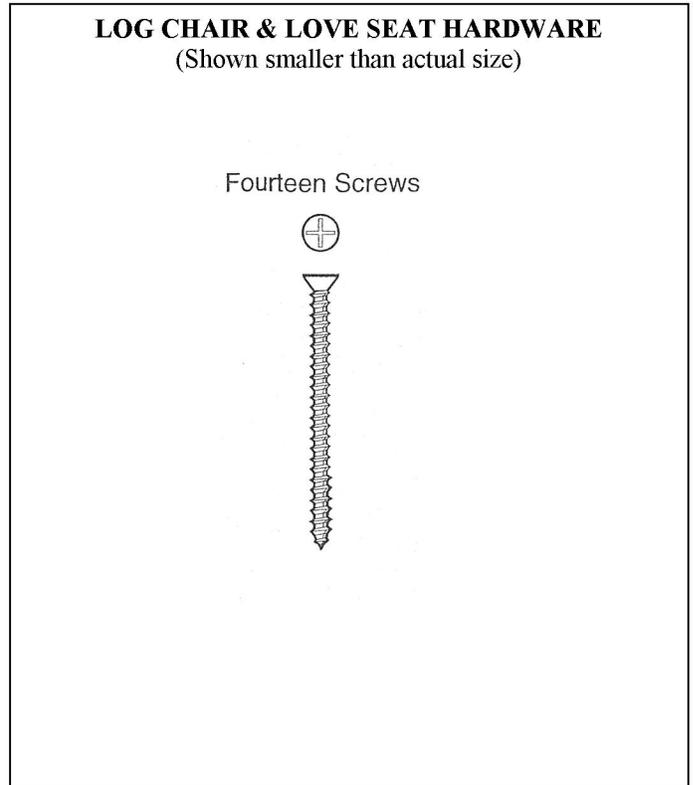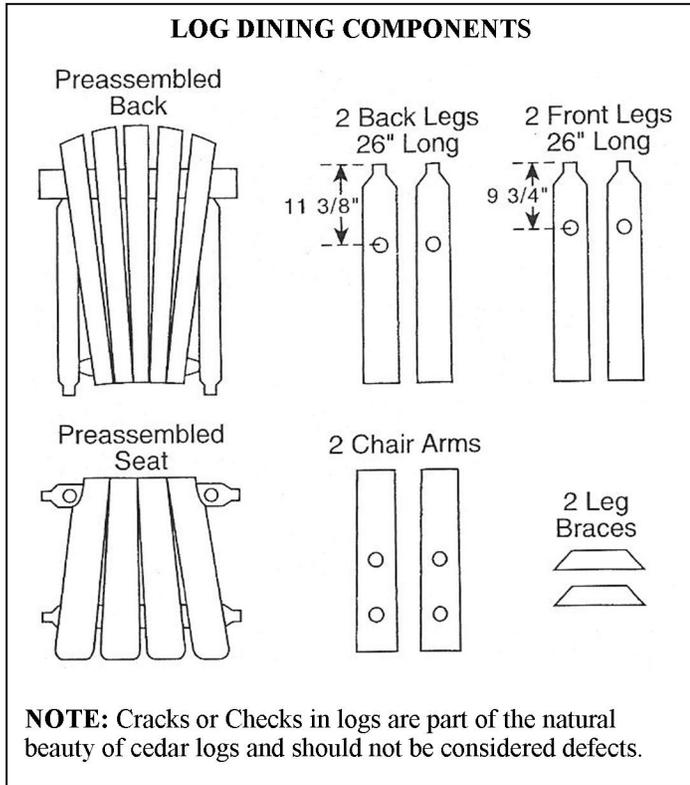

NOTE:

- Read all instructions before starting.
- Do not completely tighten any screws until the unit is fully assembled and setting on a level surface.
- Use a rubber mallet (or a block of wood between the hammer and the unit) to drive doweled ends into holes as far as possible.

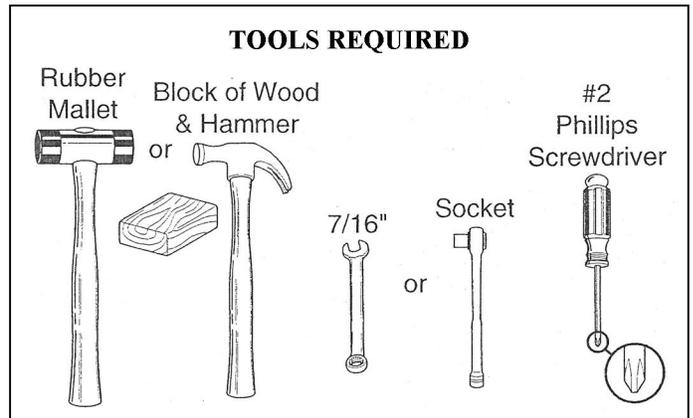

STEP 1 Lay assembled seat on floor. Insert dowel end of uprights on assembled back into holes on the back seat rail, adjust uprights in or out as needed to align properly. Do not tap on seat back with hammer.

To keep the seat rail from splitting, lay the back on the floor and drive the seat onto the doweled ends by hitting on the bottom of the seat assembly.



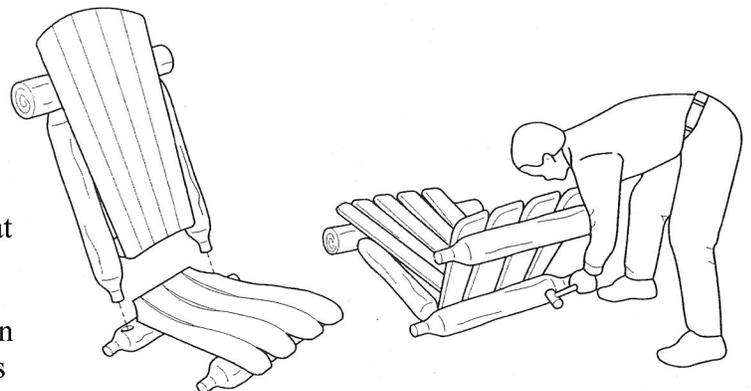


figure 1

STEP 2 Put ARMS onto legs by inserting dowel ends of front and back legs into holes in arms. (NOTE: Position of the hole on back leg is lower than hole on front leg.) Drive arm onto leg assembly as far as possible, stopping where taper begins. The drilled holes on each Leg should face the same direction as shown in figure 2.

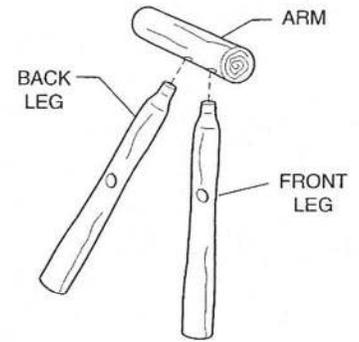

STEP 3 Lay back and seat assembly on its side and insert dowel ends of seat rail into holes on each leg. Drive legs on as far as possible. Turn assembly over and repeat procedure for the other side.

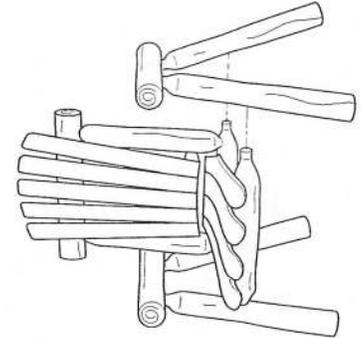

STEP 4 Set chair in upright position on a level surface and when legs are in proper position, bring ARM in against UPRIGHT. Tighten the preinstalled lag screws into the pilot hole in the arm with a wrench or socket.

Secure doweled joints in place with screws perpendicular to the doweled ends as shown in figure 4. Repeat procedure for other side.

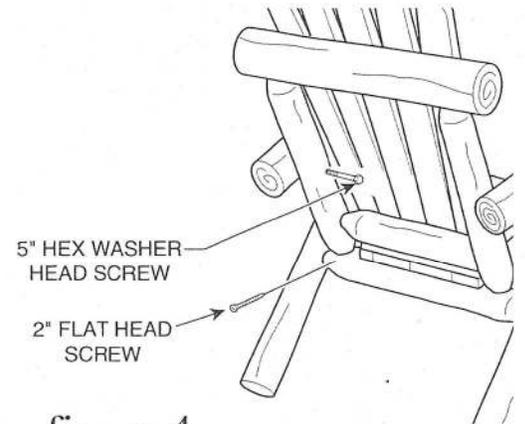


figure 4

STEP 5 Tilt chair back and screw a brace on each side of front legs to chair bottom.

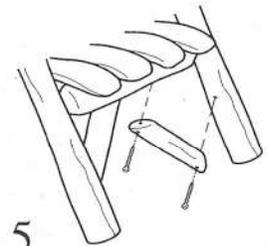


figure 5

STEP 6 Set unit on a level surface and tighten down all lag screws firmly to secure unit. Secure all dowel joints in place with screws perpendicular to the doweled end as shown in figure 6.

Your chair is now assembled and ready for finish or immediate use.

If you have hardware left over after completing your unit, it most likely has been assembled incorrectly, and may not be safe to use. Please call Customer Service at 800-427-5136 for assistance.

Check all joints for tightness before and during each usage season.

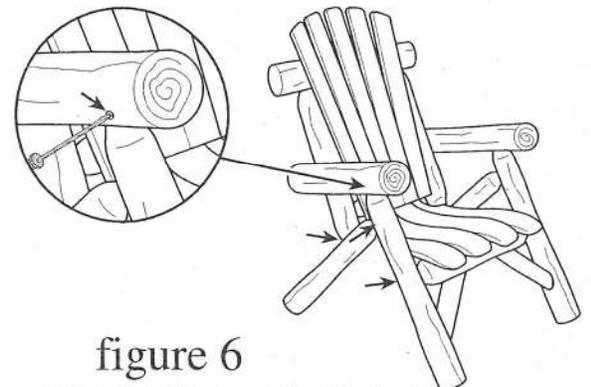


figure 6